
FIGURE 5.3.4.A FLOW RESTRICTOR (TEE)

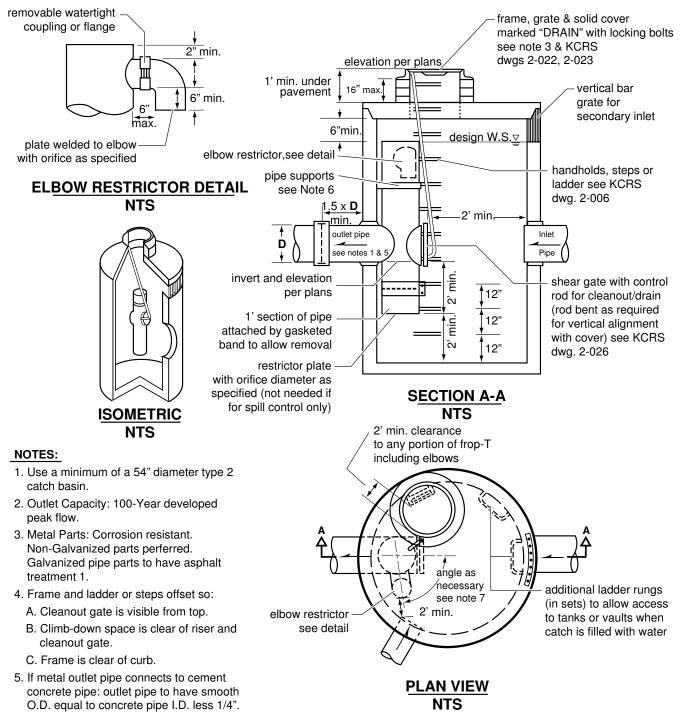

- Provide at least one 3" X .090 gage support bracket anchored to concrete wall. (maximum 3'-0" vertical spacing)
- 7. Locate elbow restrictor(s) as necessary to provide minimum clearance as shown.
- 8. Locate additional ladder rungs in structures used as access to tanks or vaults to allow access when catch basin is filled with water.